

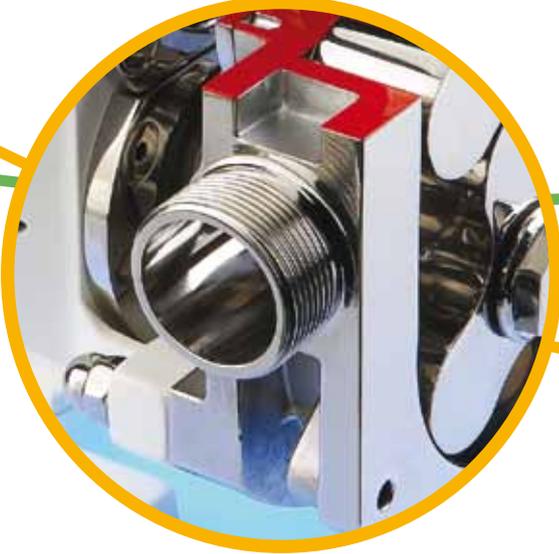


Luna Range

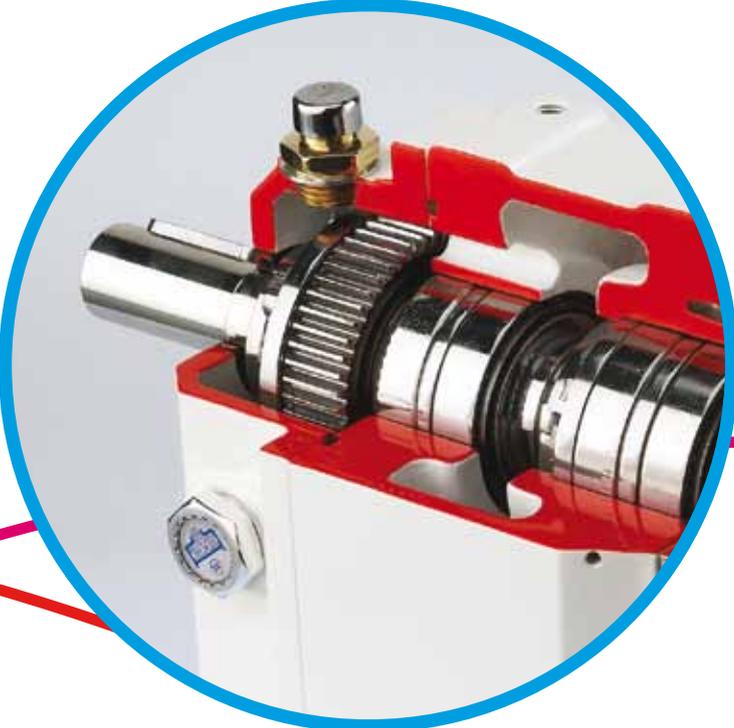

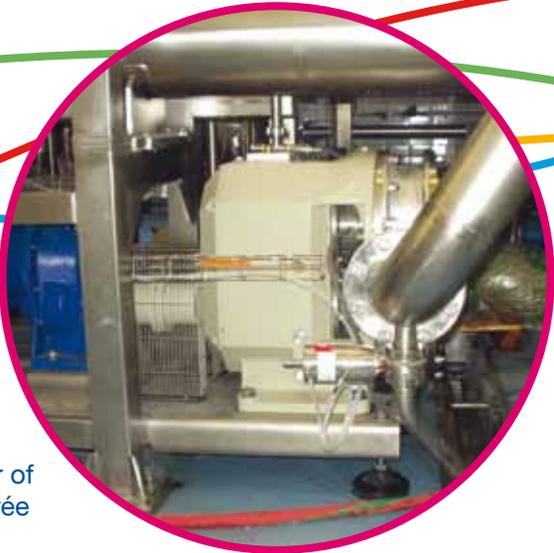

Transfer of
fruit purée

Features & Benefits

Capacity	up to 300m ³ /h
----------	----------------------------

Pressure	up to 20 bar
----------	--------------

Temperature	-40°C up to +200°C
-------------	--------------------

Typical applications include:

- Fruit and tomato concentrates
 - Mayonnaise, jam and sauces
 - Vegetable purées
 - Chocolate, cream, fillings
 - Wine and beer
 - Mineral water, fruit juices, soft drinks
 - Yoghurts
 - Homogenized meat
 - Starch
 - Yeast products
 - Ice-cream, gelatine
 - Syrup and sugar solutions
 - Milk, soft cheese, butter
-

“A range of stainless steel rotary lobe pumps designed to prevent product contamination and offer quick and easy cleaning in place.”



Hygienic design


As the rotors rotate in an opposite direction without contact with each other or the casing, the metal parts do not wear and contaminate the product. The chamber separating the pump body and gearbox also avoids any contamination between the pumped fluid and the lubricant.

Materials of construction

The shafts, rotors and pump body are all manufactured in AISI 316 stainless steel as standard. The bearing housing can also be supplied with nickel coating.

Port fittings

Welded ports for maximum hygiene and flexibility. Models available with Gas-BSP, UNI, DIN, SMS, IDF, RJT and Tri-Clamp connections.

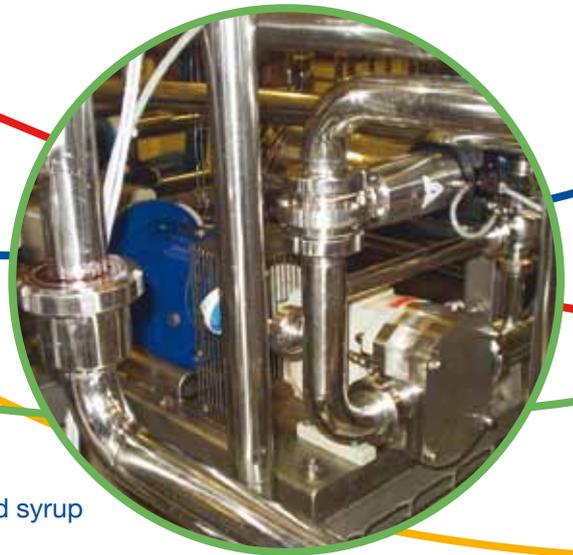

Pumping concentrated syrup



Certification

High specification models are designed according to 3A and EHEDG certification.

Monobloc design

Models are available with the drive directly fixed to the pump, creating a compact and light unit.

Gentle pumping action

Minimises shear and crush damage to delicate liquids containing soft solids.

Dry running

Can run dry for short periods when using standard rotors. Suitable for applications where dry-running occurs or is required as part of the process.

C.I.P and S.I.P. cleaning

The pumps are suitable for clean in place and sterilisation in place. They can also be easily dismantled for manual cleaning.

Mounting

Pumps can be supplied either bareshaft or complete with a baseplate or trolley to suit the customer's requirements.

Aggressive materials

For pumps transferring aggressive products, shafts and rotors can be supplied in titanium, hastelloy or monel, to reduce wear.

Enlarged suction inlet

Models can be supplied with an enlarged suction inlet to allow highly viscous products like butter, dough or paste to be pumped.

Sealing options

Packed gland, flushed packed gland, single or flushed double mechanical seals available, together with single and double lip seal, front loading lip or O ring seals.

Versatile

Can be installed vertically or horizontally to suit the application. Removable feet allow the ports to be aligned to suit application requirements. Flow is reversible without loss of efficiency and the range is versatile in handling high or low viscosity products.

Robust drives


Variable speed via a mechanical, hydraulic or belt adjustable speed unit or inverter integrated into the motor. Alternatively it can be fixed speed via reduction geared motor.

Rotors

Stainless steel tri-lobes, bi-lobes and acteon dual wing rotary piston gears available to ensure smooth and consistent transfer of liquids or viscous products.

Accessories

Models can be produced in Aseptic versions and also supplied with a cooling and heating jacket body to keep pumped fluid at a constant temperature. Hygienic by-pass or pressure relief valves are also available.


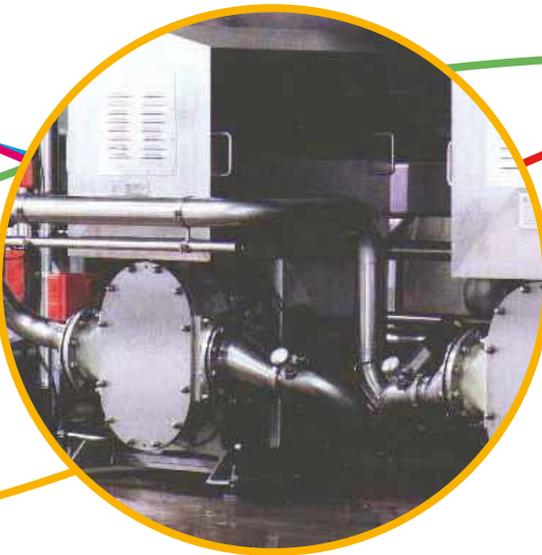


Pumping cheese curd

Product Dimensions



Luna LB Lobe Pumps

MODEL	A	B	C	D	E	F	G	H	I	J	K	L	Weight Kg
LB100	DN25	157	115.5	18	45	80	265	58.6	125	85	108	42	10.5
LB105	DN38	210	181	24	50	125	290.5	93.5	128	90	115.5	42.5	20
LB110	DN38	210	181	24	50	125	290.5	93.5	128	90	115.5	42.5	20
LB115	DN38	210	181	24	50	125	302.5	93.5	128	90	115.5	54	21
LB215	DN38	248	235.5	28	55	165	365.5	127.5	152	130	136.5	52	41
LB220	DN51	248	235.5	28	55	165	380.5	127.5	152	130	136.5	61	43
LB325	DN63	290	270	35	65	190	459	145	174	170	167	62	63
LB330	DN76	286	270	35	65	190	474	145	174	170	167	71	65
LB430	DN76	385	367.5	48	85	255	543.5	192.5	235	195	206.5	76.5	130
LB440	DN101	389	367.5	48	85	255	543.5	192.5	235	195	206.5	84	135
LB470	DN101	439	442.5	55	110	300	654	230	300	255	255	63.5	225
LB490	DN101	439	442.5	55	110	300	654	230	300	255	255	93	233
LB550	*	*	515	55	110	350	637	264	350	250	227	81.5	270
LB660	*	*	690	80	140	480	807	365	460	360	283	92	610
LB680	*	*	690	80	140	480	867	365	460	360	283	122	670

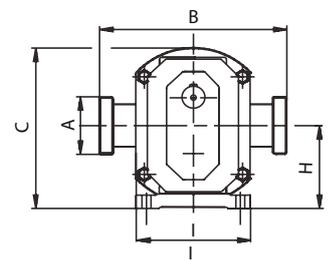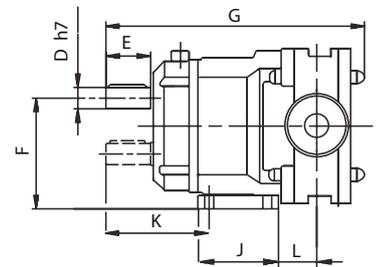


Luna LE Monobloc Lobe Pumps



MODEL	A	B	C	D	E	F	G	H	I	J	K	L	M	N	Weight Kg
LE110	1 1/2"	170	185	19	134	180	291	67.5	93.5	231	188	120	80	125	20
LE115	1 1/2"	170	185	20	134	180	303	79	93.5	243	199	120	80	125	21
LE220	2"	208	245	25	160	200	359	104	127.5	311	256	160	110	165	43
LE330	3"	236	290	30	180	240	443	131	145	389	339	200	130	190	65
LE390	3"	336	290	30	180	240	458	151	145	404	359	200	130	190	69
LE440	4"	335	355	30	240	300	530	132.5	192.5	453	367.5	200	130	255	135

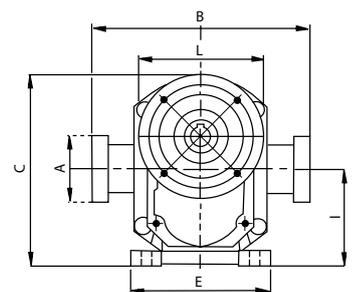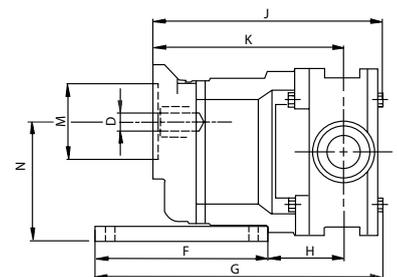

All dimensions in mm's, unless otherwise stated and for guidance only.
 Dimensions are for RJT Ports, others available on request.
 * Please contact Mono for these port dimensions and for full certified drawings.

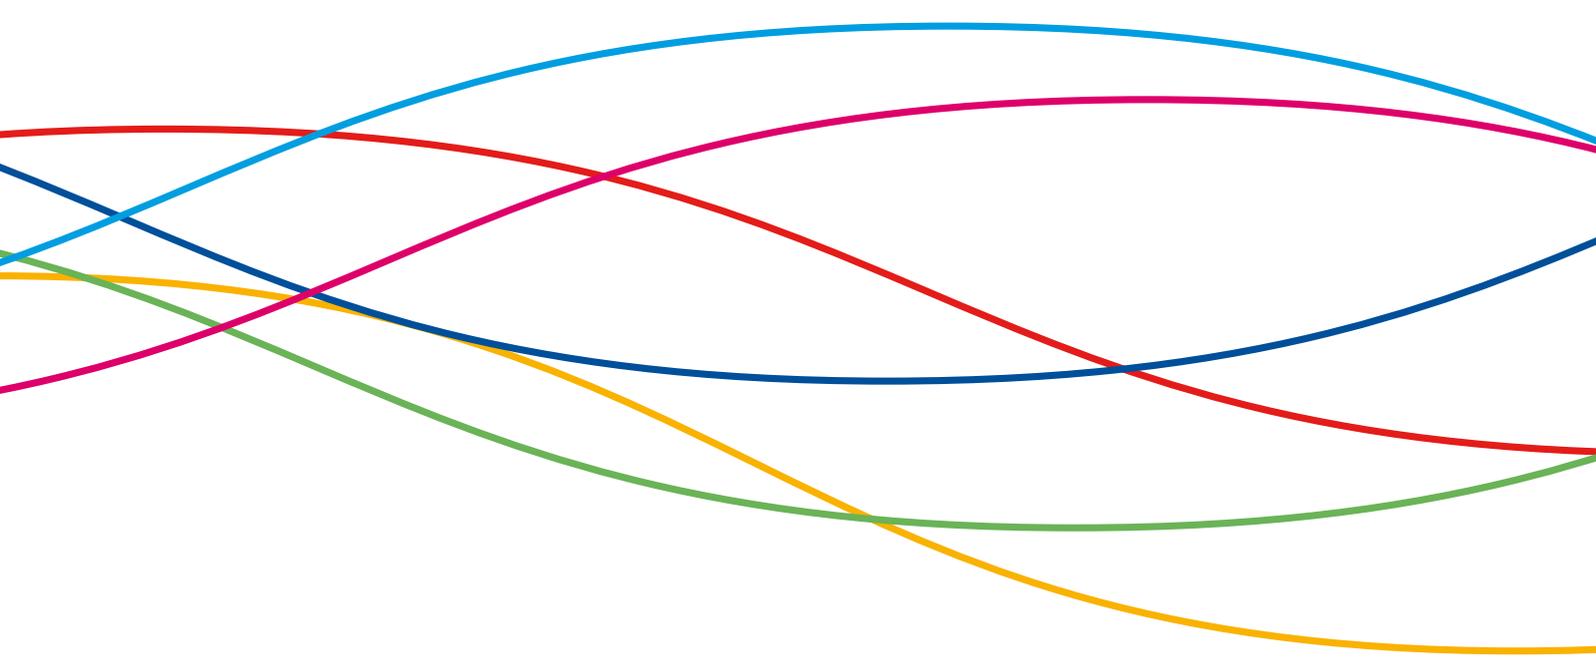

Performance Data

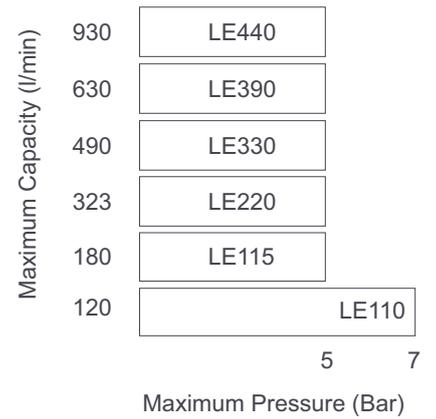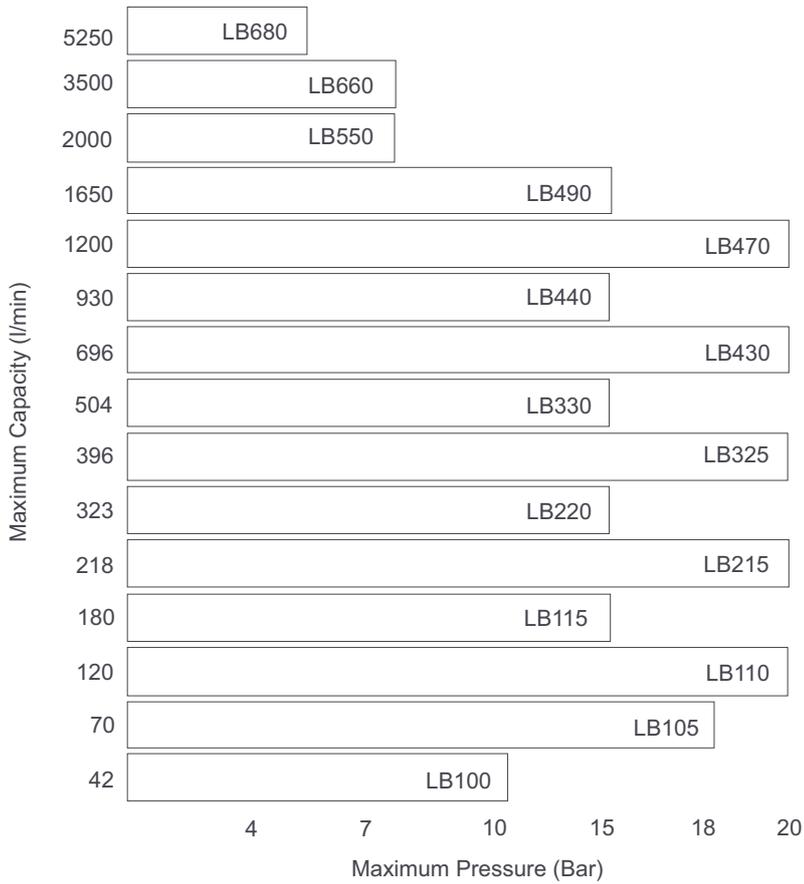

Maximum pressure is dependant on materials of construction, product temperature and rotor selection. For guidance in selecting a pump please contact NOV Mono®.

Europe

Mono Pumps Ltd, Martin Street, Audenshaw
Manchester, M34 5JA, England
T. +44 161 339 9000
E. info-mono@nov.com

D.M.I EST, 56, rue du Pont
88300 Rebeuville, France
T. +33 3 29 94 26 88
E. dmi-est@dmi-est.fr

Americas

Monoflo Inc., 10529 Fisher Road
Houston, Texas 77041, USA
T. +1 713 980 8400
E. monoflo@nov.com

Monoflo S.A., Ing Huergo 2239
(1842) Monte Grande
Pcia. de Buenos Aires, Argentina
T. +54 11 4290 9940/50
E. info.monoflo@nov.com.ar

Monoflo Canada, 6010 – 53rd Ave
Alberta, Lloydminster
T9V2T2, Canada
T: + 1 780 875 5584
E: info.monoflo@nov.com

Asia

Mono Pumps Ltd, Building 5,
Madong Industrial Park, 1250 Sicheng Rd
Malu Town, Jiading District, Shanghai 201801
T. +86 21 3990 4588
E. monoshanghai@nov.com

Australasia

Mono Pumps (Australia) Pty Ltd
75 Frankston Gardens Drive
Carrum Downs, Victoria 3201, Australia
T. 1800 333 138
E. ozsales@nov.com

Mono Pumps (New Zealand) Ltd
35-41 Fremlin Place, Avondale
Auckland, 1026, New Zealand
T. +64 9 829 0333
E. info@mono-pumps.co.nz

Melbourne	T.	03 9773 7777	F.	03 9773 7400
Sydney	T.	02 8536 0900	F.	02 9542 3649
Brisbane	T.	07 3350 4582	F.	07 3350 3750
Adelaide	T.	08 8447 8333	F.	08 8447 8373
Perth	T.	08 9303 0444	F.	08 9303 0400
Darwin	T.	08 8931 3300	F.	08 8931 3200
Kalgoorlie	T.	08 9022 4880	F.	08 9022 3660

www.monopumps.com.au



© Mono Pumps Limited June 2011 Literature reference: ART72/2
Published information other than that marked CERTIFIED does not extend any warranty or representation, expressed or implied, regarding these products. Any such warranties or other terms and conditions of sales and products shall be in accordance with Mono Pumps Limited standard terms and conditions of sale, available on request.
Mono® is a registered trademark of Mono Pumps Ltd.
Registered in England No 300721



One Company, Unlimited Solutions